


LXSS

High Power LED Module

Made to fit your projects.

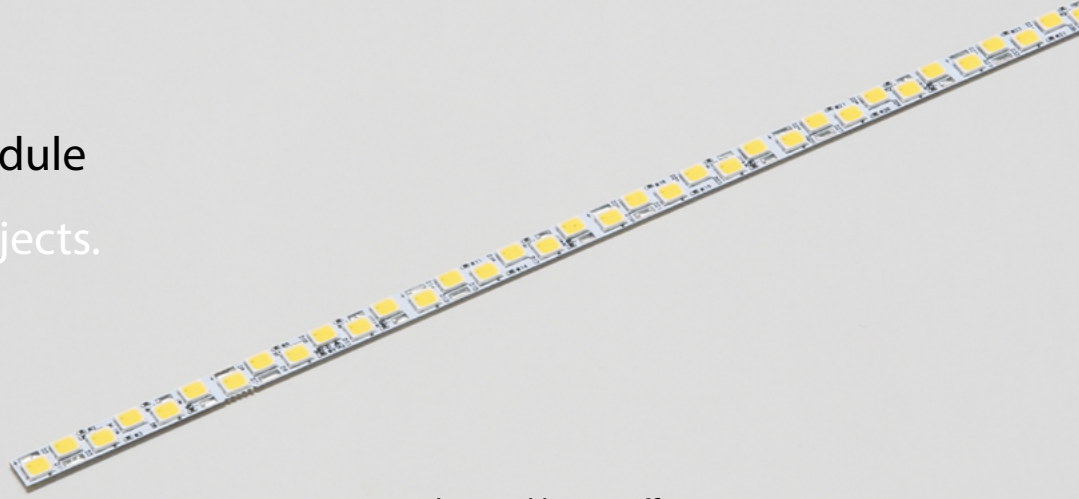

- Enhanced beam effect SMD LED
- Compact 5mm width LED board
- Enhanced CRI Ra 80~95
- Pitch 4.6mm

LXSS - 495 - NZ

1 2 3 4

1 Fixture name :

2 Length :

3 LED colors :

4 Color rendering:

Environment of use :

Power supply:

Maximum length in series :

LXSS = High Power LED Module

27.5 to 3465 mm by unit of 27.5 mm

L22 = Light bulb (2200K) L25 = Light bulb (2500K)

L27 = Light bulb (2700K) L30 = Light bulb (3000K)

WW = Warm white (3500K) W = White (4000K)

NW Neutral white = (4500K) N = Neutral white

(5000K) DN = (5700K) D = Daylight (6500K)

None = Ra ≥ 80 Z = Ra ≥ 95

indoor cove / display lighting / accent lighting


DC 24V

3465mm


Photometric data

Measured fixture: LXSS-495-N (5000K)

Light Intensity distribution

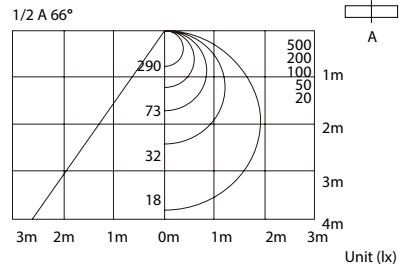

Candlepower Distribution

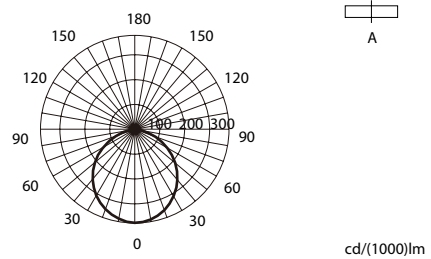

DC 24V specifications

Reference	Length (mm)	Minimum length (mm)	Number of LED	CRI (Ra)	Watts (W)	Amps (A)	Maximum length (mm)	Luminous flux (lm)
LXSS-495	495	27.5	108	≥ 80	7.7	0.32	3465	860
LXSS-495-Z	495	27.5	108	≥ 95	8.1	0.34	3465	750

Dimensions

Unit (mm)

