


# LXSW

## High Power LED Module

Made to fit your projects.

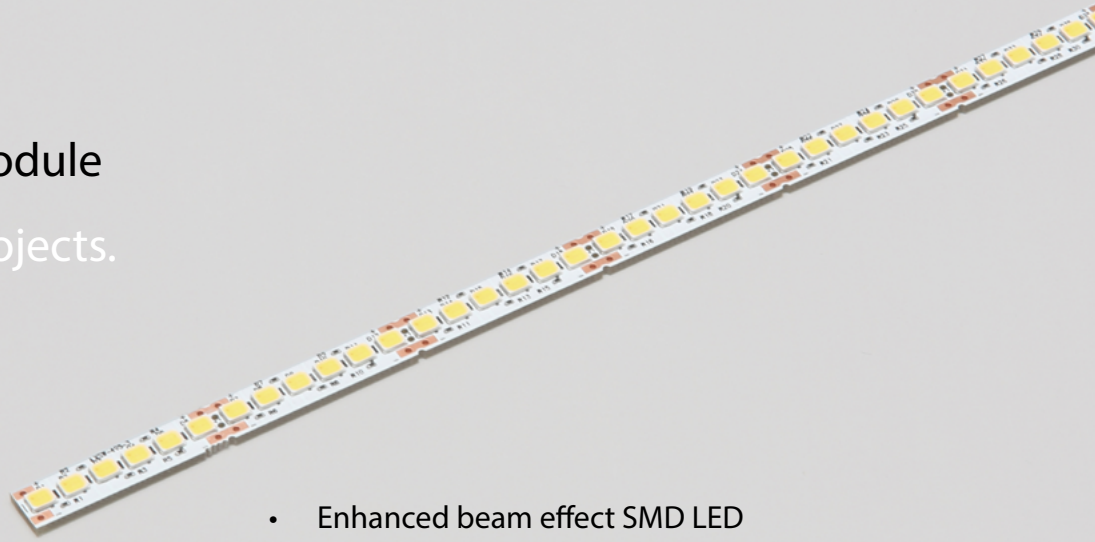

- Enhanced beam effect SMD LED
- 7mm width LED board with enhanced heat transfer
- Enhanced CRI Ra 80~95
- Pitch 4.6mm

### LXSW - 495 - NZ


1 2 3 4

- 1 Fixture name : LXSW = High Power LED Module  
 2 Length : 27.5 to 3960 mm by unit of 27.5 mm  
 3 LED colors : L22 = Light bulb (2200K) L25 = Light bulb (2500K)  
 L27 = Light bulb (2700K) L30 = Light bulb (3000K)  
 WW = Warm white (3500K) W = White (4000K)  
 NW Neutral white = (4500K) N = Neutral white (5000K) DN = (5700K) D = Daylight (6500K)  
 None = Ra ≥ 80 Z = Ra ≥ 95
- 4 Color rendering:  
 Color rendering (CRI): 80~95 Ra  
 Environment of use : indoor cove / display lighting / accent lighting  
 Power supply: DC 24V  
 Maximum length in series : 3960mm


### Photometric data

Measured fixture: LXSW-495-N (5000K)

#### Light Intensity distribution

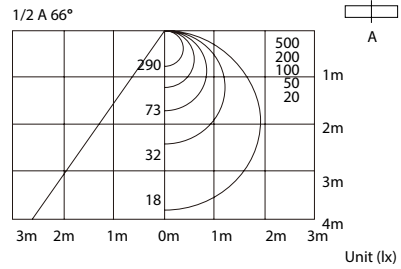

#### Candlepower Distribution

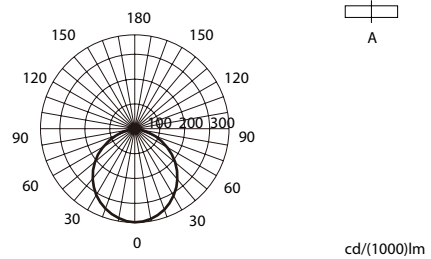

### DC 24V specifications

Reference	Length (mm)	Minimum length (mm)	Number of LED	CRI (Ra)	Watts (W)	Amps (A)	Maximum length (mm)	Luminous flux (lm)
LXSW-495	495	27.5	108	≥ 80	7.7	0.32	3960	860
LXSW-495-Z	495	27.5	108	≥ 95	8.1	0.34	3960	750

### Dimensions

Unit (mm)

