


DC 24V specifications OT G2

| Reference | Power (W) | Current (A) | Input voltage (V) | Operation temperature (°C) | Efficiency/ Power factor | Operation condition | Standards | Dimensions (L1xL2xWxH mm) |
|---------------------|--------------|----------------|--------------------------|----------------------------|-----------------------------|---------------------|-----------------|------------------------------|
| OT30/100-200/24-G2 | 30 | DC 24V 1.25A | - - AC 1000~200V - | -30~60°C - | 83% / 0.95 | IP66 | CE, CCC, PSE | 195 x 174 x 51 x 33 |
| OT60/100-200/24-G2 | 60 | DC 24V 2.5A | | | 85% / 0.95 | | | 200 x176 x 63 x 49 |
| OT90/100-200/24-G2 | 90 | DC 24V 3.75A | | | 85% / 0.95 | | | 219 x 195 x 63 x 49 |
| OT150/100-200/24-G2 | 150 | DC 24V 6.25A | | | 85% / 0.95 | | | 239 x 215 x 63 x 49 |

When you choose a power supply, for safety and rating life reasons, power supply should not support more than 80% of wattage capacity.

Dimensions

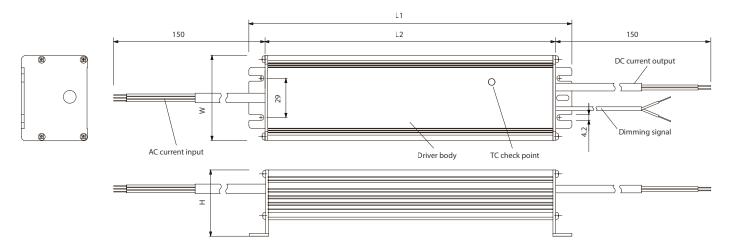

Power supply made by Osram GmbH, comply with CE, CCC and PSE standards. For more information about the products, please consult the web site: www.osram.com